PUB-NO:

EP001278034A1

DOCUMENT-IDENTIFIER: EP 1278034 A1

TITLE:

Removable and horizontally movable can holder for

refrigerators

PUBN-DATE:

January 22, 2003

INVENTOR-INFORMATION:

NAME

COUNTRY

MARTINOIA, ROSANNA

IT

BRAMBILLA, ENRICO

IT

ASSIGNEE-INFORMATION:

NAME

COUNTRY

WHIRLPOOL CO

US

APPL-NO:

EP02010292

APPL-DATE:

May 21, 2002

PRIORITY-DATA: ITMI20010405U (July 18, 2001)

INT-CL (IPC): F25D023/04

EUR-CL (EPC): F25D023/04

ABSTRACT:

CHG DATE=20030305 STATUS=0> A can holder (11) for refrigerator doors (1),

comprising at least one cradle (12) for supporting a can (L), said cradle (12) being: a) provided with means (14) for its hooking to a supporting part (8)

present in the \underline{door} (1); b) inclined to the horizontal and to the vertical when

in use, so as to support the can L with its axis inclined upwards; c) provided

with antirotation means (15) which bear on the <u>door</u> to also obtain and maintain

the inclination (Figure 1). <IMAGE>





(11) EP 1 278 034 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication: 22.01.2003 Bulletin 2003/04

(51) Int Cl.7: F25D 23/04

(21) Application number: 02010292.7

(22) Date of filing: 21.05.2002

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU

MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 18.07.2001 IT MI20010405 U

(71) Applicant: WHIRLPOOL CORPORATION
Benton Harbor Michigan 49022 (US)

(72) Inventors:

Martinoia, Rosanna
 V.ie G. Borghi 27, 21025 Comerio (IT)


Brambilla, Enrico
 V.le G. Borghi 27, 21025 Comerio (IT)

(74) Representative: Guerci, Alessandro
Whirlpool Europe S.r.l.
Patent Department
Viale G. Borghi 27
21025 Comerio (VA) (IT)

(54) Removable and horizontally movable can holder for refrigerators

(57) A can holder (11) for refrigerator doors (1), comprising at least one cradle (12) for supporting a can (L), said cradle (12) being: a) provided with means (14) for its hooking to a supporting part (8) present in the door

(1); b) inclined to the horizontal and to the vertical when in use, so as to support the can L with its axis inclined upwards; c) provided with antirotation means (15) which bear on the door to also obtain and maintain the inclination (Figure 1).

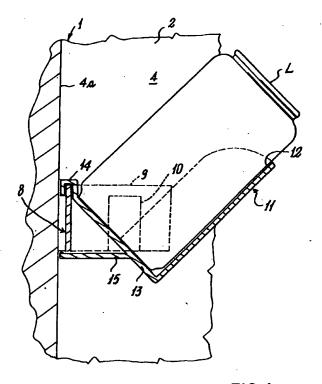

F1G. 4

Description

[0001] The present invention relates to a can holder for refrigerators.

[0002] Refrigerator doors are known to present removable trays, provided with side walls, in which drink cans are usually placed to cool them. The cans are located vertically on the trays, however the presence of the side wall makes it difficult both to position them on and remove them from the tray. There is the additional drawback that if the tray is not completely occupied, the cans move noisily at each door opening/closure.

[0003] The main object of the present invention is to provide a can holder for refrigerator doors which enables the cans to be located such that they do not move on opening and closing the refrigerator door, while being comfortably withdrawable and positionable.

[0004] A further object of the present invention is to provide a can holder which enables better use to be made of the space defined by the refrigerator door.

[0005] These and further objects which will be more apparent from the ensuing detailed description are attained by a can holder in accordance with the teachings of the accompanying claims.

[0006] The invention will be better understood from the following detailed description, which is provided by way of non-limiting example and is given with reference to the accompanying drawing, in which:

Figure 1 is a schematic perspective view of a can holder of the invention mounted in the interior of a refrigerator door; this figure also shows by dashed and dotted lines the can holder while being removed

Figure 2 is a schematic perspective view of two side-by-side can holders mounted in the interior of the refrigerator door;

Figure 3 is a schematic horizontal section on the plane A-A of Figure 1;

Figure 4 is a vertical section through the can holder 40 applied to the door (on the inner side thereof).

[0007] In the figures the reference numeral 1 indicates a generic refrigerator door the vertical lateral side walls of which are indicated by 2 and 3. These together with a lower side wall 4 and an upper side wall, this latter not shown, defines a compartment 5 in which removable trays 6 are provided in known manner. In order to be supported by the lateral side walls 2 and 3, these trays laterally present seats 10 which are closed at one end (the upper end) and are mounted on projecting parts or appendices 7 of a shape substantially mating with that of the seats and present on the inner face of the side walls 2 and 3.

[0008] In a like manner there is connected to or mounted on the door a bar-like support element 8 provided at its two ends with appendices 9 in which closed seats 10 are present, of a shape mating with the projecting parts or appendices 7.

[0009] The bar-like element 8 acts as a support for one or more can holders 11. The can holder, preferably constructed of plastic material, comprises one or more side-by-side cradles 12 for the inclined housing of cans L.

[0010] The cradles 12 comprise a concave part 12a (preferably in the form of a circular ring segment) and a common base wall 13 terminating upperly with a hookshaped appendix 14 by which the can holder engages, removably and translatably (see arrows F1 and F2), with the bar-like support element 8 (see Figure 4).

[0011] The base wall 13 and the concave part 12a are at right angles to each other and, when in use, the base wall 13 is inclined, preferably by 35°-45° (downwards), to the vertical end wall 4a of the compartment 4. As a result, the cans L are supported upwardly inclined in the cradles, as shown in Figure 4, making it simple to withdraw them from the cradle in which they rest.

[0012] For its antirotational stability and to preserve the inclination, the base 13 of the can holder comprises below the hook-shaped appendix a transverse piece 15 which bears against the end wall 4a. The number of cradles 12 present in the can holder can be one or more, for example three as shown.

[0013] The can holder can be easily removed from its support bar 8 by lifting it (see arrow F1 in Figure 1) and can also be moved along the bar (see arrow F2 in Figure 1) if space requirements, deriving for example from the presence of a bottle of considerable height in an underlying tray 6, require it.

Claims


35


45


- 1. A can holder (11) for refrigerator doors (1), characterised by comprising at least one cradle (12) for supporting a can (L), said cradle (12) being: a) provided with means (14) for its hooking to a supporting part (8) present in the door (1); b) inclined to the horizontal and to the vertical when in use, so as to support the can L with its axis inclined upwards; c) provided with antirotation means (15) which bear on the door to also obtain and maintain the inclination.
- 2. A can holder as claimed in claim 1, wherein the cradle (12) presents an arcuate part (12a) and a base part (13) perpendicular to the preceding.
- 3. A can holder as claimed in claim 1, wherein said hooking means (14) are represented by a hookshaped extension to the base (13) of the cradle (12).
- A can holder as claimed in claims 1 and/or 2, where-55 in the antirotation means for also obtaining and maintaining the inclination are represented by a further extension (15) to the base (13) of the cradle (12), said extension (15) being located below the

2

hooking means (14).

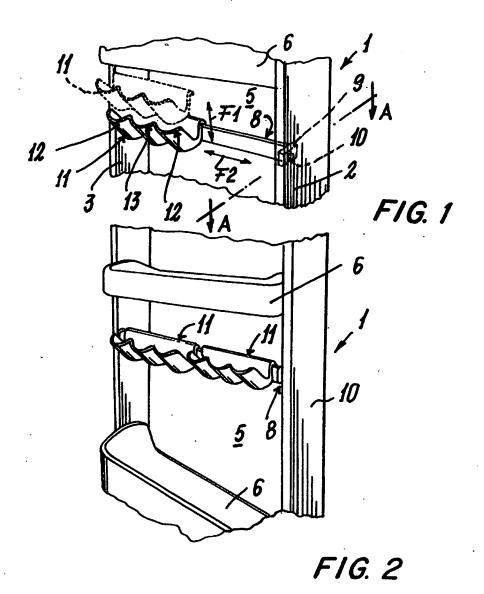

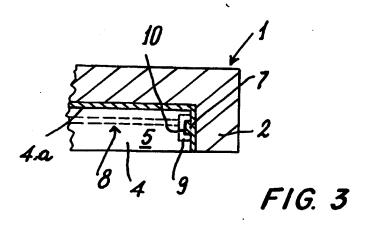

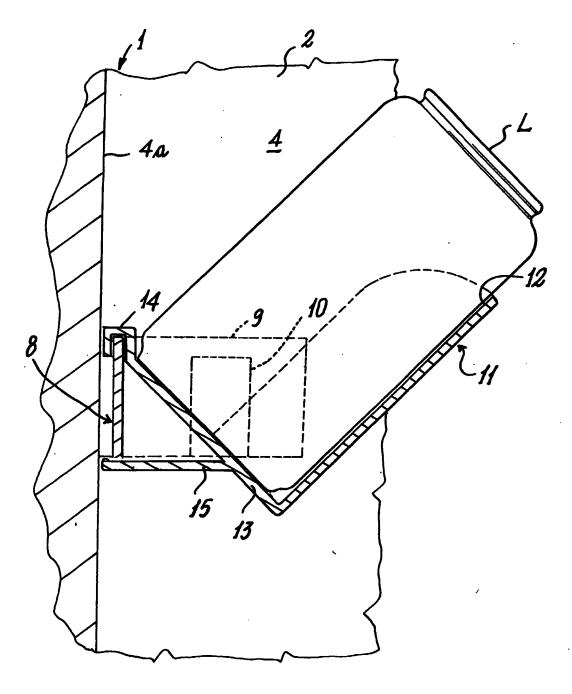

F1G. 4



EUROPEAN SEARCH REPORT

Application Number

Category	Citation of document with Indic of relevant passage		Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CL7)	
X A	DE 199 49 238 A (AEG 19 April 2001 (2001-0 * abstract * * column 2, line 67 - * figures 1-3,6 *	4-19)	1,3 2,4	F25D23/04	
А	PATENT ABSTRACTS OF J vol. 1998, no. 10, 31 August 1998 (1998- -& JP 10 122734 A (FU 15 May 1998 (1998-05- * abstract * * figures 1-3 *	08-31) JITSU GENERAL LTD),			
A	DE 198 21 824 A (AEG 18 November 1999 (199				
A	GB 2 203 028 A (OCEAN 12 October 1988 (1988				
A	DE 82 33 134 U (BOSCH GMBH) 5 May 1983 (198			TECHNICAL FIELDS SEARCHED (Int.Cl.7) F25D	
A	GB 1 381 650 A (IRE S 22 January 1975 (1975			A47B	
	,			! : :	
	The present search report has been	n drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 July 2002	De	Examiner Graaf, J.D.	
X : parti Y : parti	ATEGORY OF CITED DOCUMENTS cularly relevant if taken alone cularly relevant it combined with another ment of the same category	T : theory or princip E : earlier petent do after the filing da D : document ched L : document cled t	le underlying the incurrent, but publication the application	nvention	

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 02 01 0292

This annex lists the patent tamity members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-07-2002

Patent document cited in search report		Publication date		Patent family member(s)		Publication date	
DE 1994	9238	A	19-04-2001	DE	19949238	A1	19-04-2001
JP 1012	2734	A _.	15-05-1998	NONE			
DE 1982	1824	· A	18-11-1999	DE	19821824		18-11-1999
				ES	2167151		01-05-2002
				IT	PN990018	UI	15-11-1999
GB 2203	028	A	12-10-1988	ΙT	210137	Z2	14-11-1988
				DE	8802781		05-05-1988
				ES	1005405		01-11-1988
	··		·	FR	2613466	A3 	07-10-1988
DE 8233	134	U	05-05-1983	DE	8233134	U1	05-05-1983
6B 1381	650	A	22-01-1975	BE	789297	A1	15-01-1973
				CH	546934		15-03-1974
				DE	7236631	-	04-01-1973
				ES Fr	184627 2172638	-	01-06-1974 28-09-1973
							,
							•
	•						

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82